




## Grizzly screen for limestone

Product group: Linear vibrating screen

Industrial process: screening, classifying, dewatering

Industry: Construction, Quarries, Pits, Mining, Cement

Type of drive: Unbalance exciter

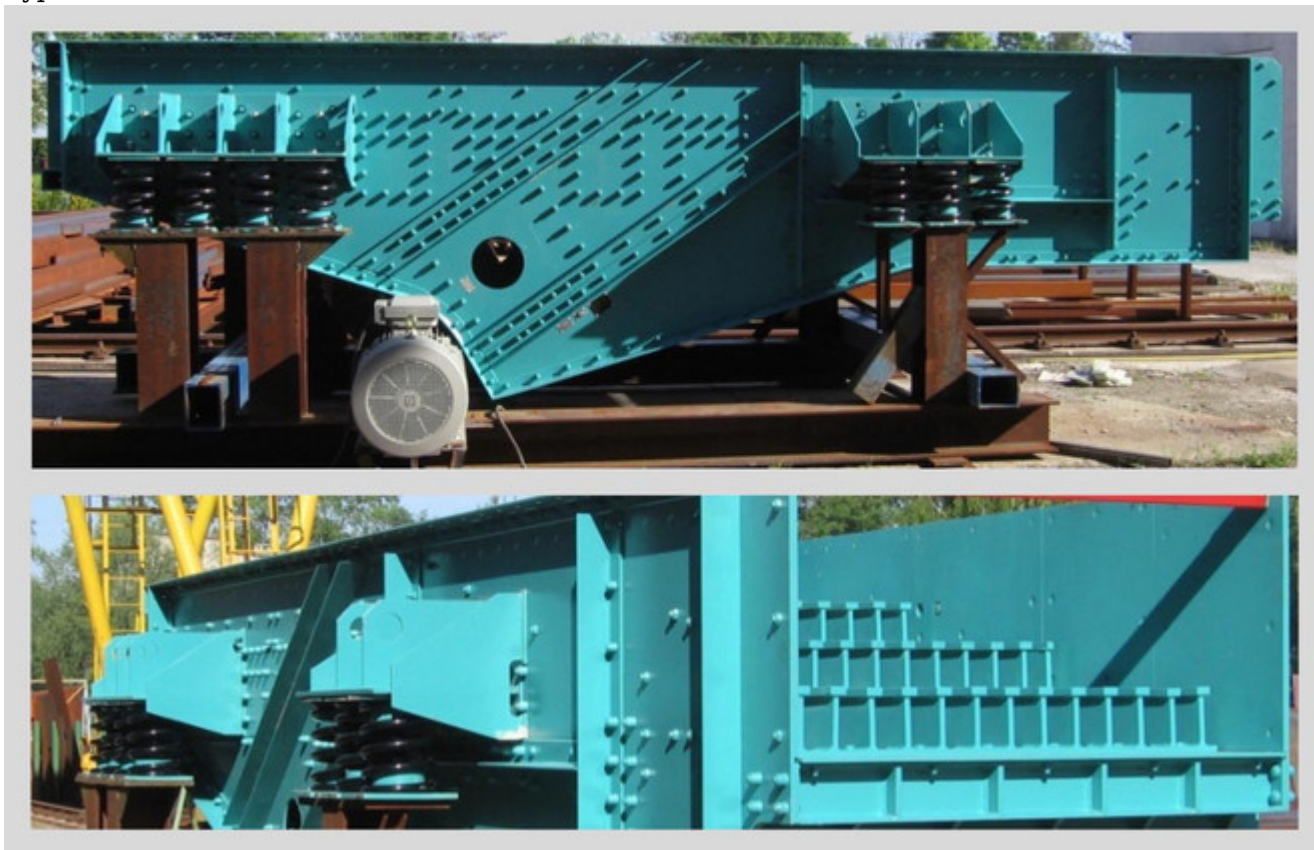

capacity (t/h): 800 | bulk: limestone | density (t/m<sup>3</sup>): 1,44 | grain size (mm): 1000  
function:

Primary system:

- AVITEQ hopper discharge
- loading a crusher 1400 mm wide
- screening separation about 40 mm.

solution:

Grizzly screen type VSR 1300/7500-ASS VU78000 / 8-S08:

- huck bold construction

- Entry zone screwed onto section beams 4000 mm long

- 4 deck bar grates arranged in a cascade and with staggered rows (gap width: 35/45 mm)
- Drive: unbalance exciter  $F_c = 450 \text{ kN}$  directly with cardan shaft to a drive motor 45 kW - 1000 U / min driven

usability:

The AViTEQ grizzly screen has to feed the crusher with a throughput up to 800 t / h. And the grizzly screen has to relieve the crusher of fine material.

place of installation: Algeria