


STOSSRÜTTLER

Impact vibrators

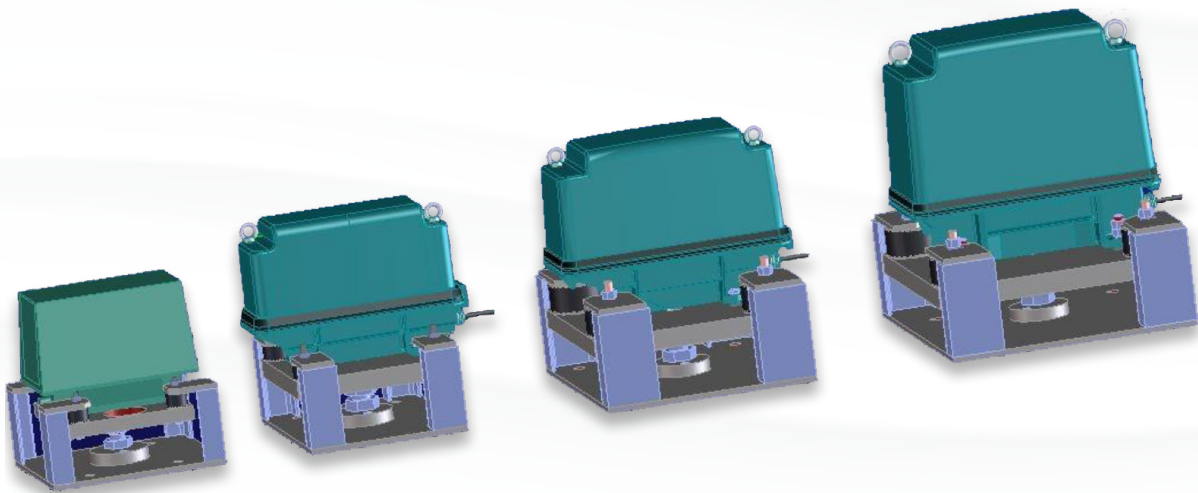

MK12

MKC

MKD

MKE

Typ Type	Schwingfrequenz Vibration Frequency	Schwingweite Vibration stroke	Befestigungsplatte Base dimension	Bauhöhe Height	Gewicht Weight	max. Stoßenergie max. Impact energy	max. Stoßkraft max. Impact force
	[Hz]	[mm]	[mmxmm]	[mm]	[kg]	[J]	[N]
MK 12/50-3	50	1,3	330x330	340	46	0,4	80
MK C100-4	100	0,6	420x300	410	86	0,8	176
MK C50-4	50	1,5	420x300	410	86	1,3	217
MK C50-4	50	1,5	420x300	410	86	1,3	217
MK C50-TE	50	1,5	420x300	410	86	1,3	217
MK C60-4	60	1,3	420x300	410	86	1,3	218
MK D50-4	50	1,4	520x400	470	142	1,7	317
MK E50-4	50	1,7	590x470	575	212	3,6	541
MK E50-4	50	1,7	590x470	575	212	3,6	541